


Hydra-Cell[®]

METERING SOLUTIONS™

Hydra-Cell[®] Metering Accessories and Options

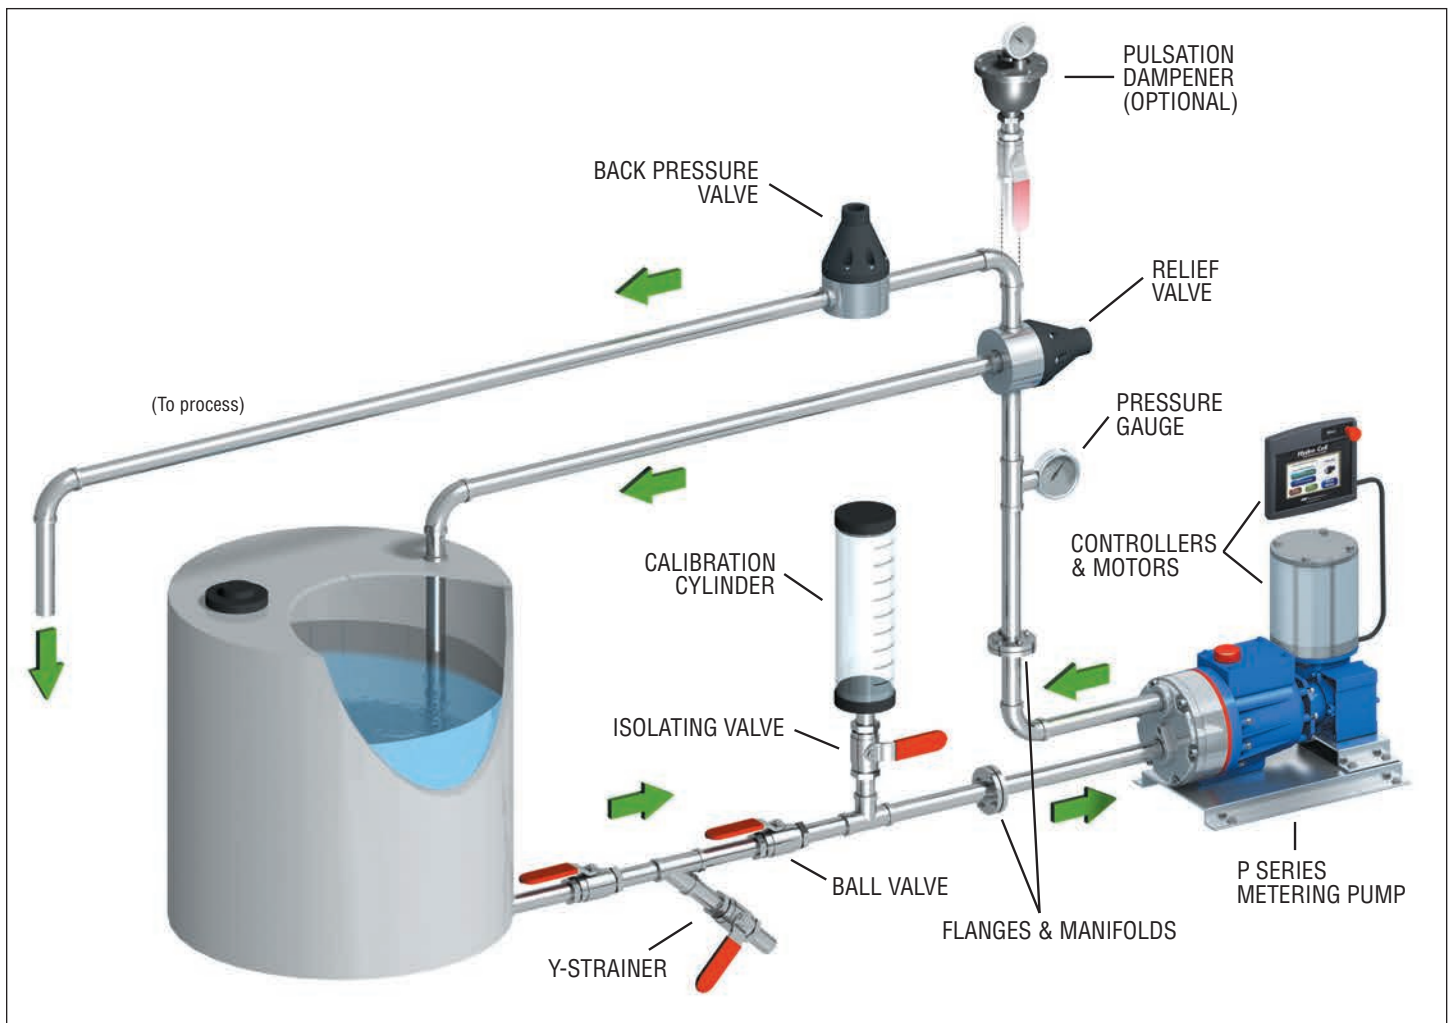

P Series and MT8 Model "Pulse-free" Pumps

Hydra-Cell® Metering Solutions



**ISO 9001: 2015
CERTIFIED**

Hydra-Cell® is a registered trademark of Wanner Engineering, Inc.
 Kel-Cell® is a registered trademark of Wanner Engineering, Inc.
 Control Freak™ is a trademark of Wanner Engineering, Inc.

Aflas® is a registered trademark of Asahi Glass Co., Ltd.
 Buna®-N (Nitrile) is a registered trademark of E.I. DuPont de Nemours and Company, Inc.
 Celcon® is a registered trademark of the Celanese Company.
 Elgiloy® is a registered trademark of Elgiloy Limited Partnership
 Hastelloy® C is a registered trademark of Haynes International, Inc.
 Hypalon® (CSM) is a registered trademark of DuPont Performance Elastomers
 Kynar® (PVDF) is a registered trademark of Arkema, Inc.
 Mesamoll® is a registered trademark of Lanxess Deutschland GmbH
 Neoprene® is a registered trademark of E.I. DuPont de Nemours and Company, Inc.
 Nitronic®50 is a registered trademark of AK Steel Corporation
 Teflon® (PTFE) is a registered trademark of E.I. DuPont de Nemours and Company, Inc.
 Viton® (FKM) is a registered trademark of DuPont Performance Elastomers.
 Zytel® (Nylon) is a registered trademark of E.I. DuPont de Nemours and Company, Inc.


Materials listed throughout this price list are for reference only.
 For complete material/alloy specifications, please contact the factory.

Contents	Page
Pump Configuration	
Duplexing.....	3
SmartDrive Motor-Controller	3
Multiplexing Capability.....	3
Base Plates.....	3
Manifolds and Flanges.....	3
Gearbox Ratios	3
Oil Systems and Kits.....	3
Actuating Oils	
Hydra-Oil.....	3
Mesamoll Oil.....	3
Motors	
Selection Process	4
Motor Frame Guidelines (P Series NEMA)	4
Motor Frame Guidelines (P Series IEC)	5
Motor Frame Guidelines (MT8 NEMA & IEC)	5
Motors/Standard (1800 & 3600 rpm)	6
Motors/Explosion-proof.....	7
Control Freak Touch-screen Metering Controller	
Features & Options	8
Selection Process	9
Control Freak Kits & Accessories.....	9
Controllers	
Selection Process	10
Controllers 1 Phase.....	10
Controllers 3 Phase.....	10
Calibration Cylinders	
Selection Process	11
PVC & Glass Calibration Cylinders	11
Pressure Valves	
Dimensions & Port Configurations	12
Selection Process	13
Back Pressure Valves.....	13
Pressure Relief Valves	14
Pulsation Dampeners	
Selection Process & Bladder Options	15
Standard Models	
(4-in. ³ / 6-in. ³ / 7.5-in. ³ / 10-in. ³ / 15-in. ³ / 36-in. ³).....	16
High Pressure Models (8-in. ³ / 12-in. ³).....	19
J-Style Control (10-in. ³ / 85-in. ³).....	19
Charging Kits	19
Other Services & Support	
Demonstration (Cutaway) Units	20
System Components.....	20
Priming Kits & Plugs	20
Replacement Parts & Tool Kits	20
Factory Services.....	20
Testing.....	21
Warranty.....	22
Worldwide Sales & Service.....	23

Pump Configuration

Duplexing

Run two pumps with one gearbox and motor. Ideal for multiple feeds and different manifolds.

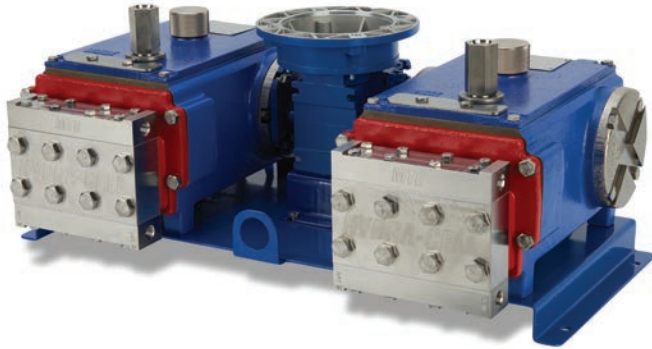

SmartDrive Motor-Controller

Space-saving, integrated motor and variable speed drive. Eliminates remote mounting and provides convenient operation from one location. Available with NEMA or IEC frames. Optional keypad and network interface.



Multiplexing Capability

Hydra-Cell Metering Solutions enables mixing ratios of multiple fluids in flexible, economical ways. Using only one motor and one gearbox, Hydra-Cell metering pumps can provide spare, double-flow, side-by-side systems, or pre-mixed ratios. (They need not be the same model Hydra-Cell pumps.)

Up to six different fluids can be metered using different manifold plates. With special manifolds, one P200 or P300 unit can feed up to three systems from one liquid end.



Base Plates

Base plates are available in epoxy-painted Carbon Steel and (depending on model) 316L Stainless Steel.

Manifolds and Flanges

Pumps can be fitted with interchangeable metallic or non-metallic pump heads.

ANSI, SAE, and DIN flanges are also available.



Gearbox Ratios

Hydra-Cell Metering Solutions pumps are fitted with interchangeable gearboxes with ratios from 60:1 to 5:1 (P Series) and 100:1 to 5:1 (MT8).



Oil Systems and Kits

Oil cooler and filter system reduces oil operating temperature, extends oil life, and promotes longevity of pump components.

Oil level monitoring mounting kits detect changes in the oil level to minimize costly interruptions and avoid potential pump damage.

Oil reservoir sight bottles provide additional volume for oil expansion and allow for quick visual inspection of oil.

For complete details about oil systems and kits, consult the Hydra-Cell Seal-less Pumps master catalog or F/M/D/H Series accessories catalog.

Actuating Oils

Hydra-Oil

Formulated to maximize pump performance by reducing wear and maintaining consistent viscosity. See the Hydra-Cell Seal-less Pumps master catalog or F/M/D/H Series accessories catalog for details about standard grades, synthetic grades, food-contact grades, and EPDM-compatible grades to suit the process requirement (e.g. temperature, pressure).

Mesamoll Oil

Mesamoll oil offers outstanding gelling capacity and high saponification resistance along with good dielectric properties and resistance to weathering and light. It is ideal for use with many types of polymers and in instances where it will come into contact with water or an alkali. Mesamoll I oil is a standard offering for P200 model pumps with Aflas diaphragms, PTFE O-rings, and FKM drive case elastomers.

Motors and Controllers

Motors

Motors provide the rotary action that operates the gear reducer on a Hydra-Cell Metering Solutions pump. A motor for a specific P Series or MT8 pump model is selected based on the horsepower (hp) or kilowatts (kW), revolutions-per-minute (rpm) and turndown ratio required for the application (performance criteria).

Selection Process

1. Locate Maximum Estimated Flow (gph or lph) at Designated Pressure (psi or bar) for your application in the Performance table of your Hydra-Cell Metering Solutions pump. (See catalog or individual product bulletin.)
2. This maximum flow rate corresponds to a color-coded rating of your Required Motor hp or kW.
3. Make sure that the hp or kW match the frame and reducer per the chart at right (NEMA motors) or page 5 (IEC motors) for P Series pumps. Also see page 5 for MT8 pumps (NEMA and IEC).
4. Using the charts on pages 6 and 7, for either 1800 rpm or 3600 rpm, select the NEMA motor by matching the Required Motor hp with the correct turndown ratio of your pump.

Note: for IEC motors, please consult factory.

P Series Motor Frame Guidelines (NEMA)

P100	HP	RPM	FRAME	REDUCER CODE
	up to 1	1800	NEMA 56C	0XX
	up to 1	3600	NEMA 56C	0XX
P200	HP	RPM	FRAME	REDUCER CODE
	up to 1	1800	NEMA 56C	0XX
	up to 1	3600	NEMA 56C	0XX
	Up to 1-1/2	1800	NEMA 56C	0XX
	up to 1-1/2	3600	NEMA 143/5TC	AXX
P300	HP	RPM	FRAME	REDUCER CODE
	up to 1	1800	NEMA 56C	0XX
	up to 1	3600	NEMA 56C	0XX
	1-1/2 or 2	1800	NEMA 56C	0XX
	1-1/2 or 2	1800	NEMA 143/5TC	AXX
	1-1/2 or 2	3600	NEMA 143/5TC	AXX
	3	3600	NEMA 143/5TC	AXX
P400	HP	RPM	FRAME	REDUCER CODE
	up to 1	1800	NEMA 56C	0XX
	up to 1	3600	NEMA 143/5TC	AXX
	1-1/2 or 2	1800	NEMA 56C	0XX
	1-1/2 or 2	1800	NEMA 143/5TC	AXX
	1-1/2 or 2	3600	NEMA 143/5TC	AXX
	3	3600	NEMA 143/5TC	AXX
P500	HP	RPM	FRAME	REDUCER CODE
	up to 1	1800	NEMA 56C	0XX
	up to 1	3600	NEMA 56C	0XX
	1-1/2 or 2	1800	NEMA 143/5TC	AXX
	1-1/2 or 2	3600	NEMA 143/5TC	AXX
	3 or 5	1800	NEMA 182/4TC	BXX
	3 or 5	3600	NEMA 182/4TC	BXX
	7-1/2 or 10	1800	NEMA 213/5TC	CXX
	7-1/2 or 10	3600	NEMA 213/5TC	CXX
	15	3600	NEMA 254/6TC	DXX
P600	HP	RPM	FRAME	REDUCER CODE
	up to 1	1800	NEMA 56C	0XX
	up to 1	3600	NEMA 143/5TC	AXX
	1-1/2 or 2	1800	NEMA 143/5TC	AXX
	1-1/2 or 2	3600	NEMA 143/5TC	AXX
	3 or 5	1800	NEMA 182/4TC	BXX
	3 or 5	3600	NEMA 182/4TC	BXX
	7-1/2 or 10	1800	NEMA 213/5TC	CXX
	7-1/2 or 10	3600	NEMA 213/5TC	CXX
	15	3600	NEMA 254/6TC	DXX

P Series Motor Frame Guidelines (IEC)

P100	KW	RPM	FRAME	REDUCER CODE
	up to 0.18	1500	IEC 63 B5	OXX
	up to 0.37	1500	IEC 71 B5	AXX
	up to 0.55	3000	IEC 71 B5	AXX
P200	KW	RPM	FRAME	REDUCER CODE
	up to 0.18	1500	IEC 63 B5	OXX
	up to 0.37	1500	IEC 71 B5	AXX
	up to 0.55	3000	IEC 71 B5	AXX
	up to 0.75	3000	IEC 80 B5	BXX
P300	KW	RPM	FRAME	REDUCER CODE
	up to 0.18	1500	IEC 63 B5	OXX
	up to 0.37	1500	IEC 71 B5	AXX
	up to 0.37	3000	IEC 71 B5	AXX
	up to 0.55	1500	IEC 80 B5	BXX
	up to 0.75	3000	IEC 80 B5	BXX
	up to 1.1	3000	IEC 80 B5	BXX
	up to 1.5	3000	IEC 90 B5	CXX
P400	KW	RPM	FRAME	REDUCER CODE
	up to 0.18	1500	IEC 63 B5	OXX
	up to 0.37	1500	IEC 71 B5	AXX
	up to 0.55	1500	IEC 80 B5	BXX
	up to 0.75	1500	IEC 80 B5	BXX
	up to 1.1	1500	IEC 90 B5	CXX
	up to 0.37	3000	IEC 71 B5	AXX
	up to 0.55	3000	IEC 71 B5	AXX
	up to 0.75	3000	IEC 80 B5	BXX
	up to 1.5	3000	IEC 90 B5	CXX
	up to 2.2	3000	IEC 90 B5	CXX
P500	KW	RPM	FRAME	REDUCER CODE
	up to 0.18	1500	IEC 63 B5	OXX
	up to 0.37	1500	IEC 71 B5	AXX
	up to 0.55	1500	IEC 80 B5	BXX
	up to 0.75	1500	IEC 80 B5	BXX
	up to 1.1	1500	IEC 90 B5	CXX
	up to 1.5	1500	IEC 90 B5	CXX
	up to 2.2	1500	IEC 100 B14	DXX
	up to 4	1500	IEC 112 B14	DXX
	up to 0.75	3000	IEC 80 B5	BXX
	up to 1.1	3000	IEC 80 B5	BXX
	up to 1.5	3000	IEC 90 B5	CXX
	up to 2.2	3000	IEC 90 B5	CXX
	up to 4	3000	IEC 112 B14	DXX
P600	KW	RPM	FRAME	REDUCER CODE
	up to 0.18	1500	IEC 63 B5	OXX
	up to 0.37	1500	IEC 71 B5	AXX
	up to 0.55	1500	IEC 80 B5	BXX
	up to 0.75	1500	IEC 80 B5	BXX
	up to 1.1	1500	IEC 90 B5	CXX
	up to 1.5	1500	IEC 90 B5	CXX
	up to 2.2	1500	IEC 100 B14	DXX
	up to 4	1500	IEC 112 B14	DXX
	up to 0.75	3000	IEC 80 B5	BXX
	up to 1.1	3000	IEC 80 B5	BXX
	up to 1.5	3000	IEC 90 B5	CXX
	up to 2.2	3000	IEC 90 B5	CXX
	up to 4	3000	IEC 112 B14	DXX

MT8 Motor Frame Guidelines (NEMA)

MT8	HP	RPM	FRAME	REDUCER CODE
	up to 1/2	1800	NEMA 56C	XX
	up to 1/2	1800	NEMA 56C	MA
	up to 1/2	1800	NEMA 143/5TC	XX

MT8 Motor Frame Guidelines (IEC)

MT8	KW	RPM	FRAME	REDUCER CODE
	up to 0.37	1500	IEC 63 B5	XX
	up to 0.37	1500	IEC 71 B5	XX
	up to 0.37	1500	IEC 71 B5	MA or MX
	up to 0.37	1500	IEC 80 B5	XX
	up to 0.37	1500	IEC 80 B5	MA or MX

Motors

1800 rpm Inverter Duty - 3 Phase

HP	Voltage	Turndown Ratio	Frame	Enclosure	Drip Cover	Part Number	Weight (lbs.)
1/4	230	1000:1	56C	TENV		M25TE18-3P56C	18
1/2	230/460	1000:1	56C	TENV		M50TE18-3P56C	20
1/2	230/460	1000:1	56C	Washdown/TENV		M50WD18R3P56CA5	25
1/2	230/460	10:1	56C	TEFC		M50TE18R3P56CA3	34
3/4	230/460	20:1	56C	TEFC		M75TE18-3P56C-P	21
1	230/460	10:1	143TC	TEFC	Yes	M100TE18R3P143TCA3	59
1	230/460	1000:1	56C	Washdown/TENV		M100WD18R3P56CA5	34
1	230/460	1000:1	143TC	TENV*		M100TN18R3P143TCA5	50
1-1/2	230/460	2:1	56C	TEFC		M150TE18-3P56C-P	29
1-1/2	230/460	10:1	145TC	TEFC	Yes	M150TE18R3P145TCA3	38
1-1/2	230/460	1000:1	145TC	TENV*		M150TN18R3P145TCA5	48
2	230/460	4:1	56C	TEFC*		M200TE18R3P56CA2	41
2	230/460	10:1	145TC	TEFC	Yes	M200TE18R3P145TCA3	44
2	230/460	20:1	145TC	TEFC		M200TE18R3P145TCA4	51
3	230/460	10:1	182TC	TEFC	Yes	M300TE18R3P182TCA3	125
3	230/460	20:1	182TC	TEFC		M300TE18R3P182TCA4	86
5	230/460	10:1	184TC	TEFC	Yes	M500TE18R3P184TCA3	125
5	230/460	20:1	184TC	TEFC		M500TE18R3P184TCA4	88
7-1/2	230/460	10:1	213TC	TEFC	Yes	M750TE18R3P213TCA3	185
7-1/2	230/460	20:1	213TC	TEFC		M750TE18R3P213TCA4	98
10	230/460	10:1	215TC	TEFC	Yes	M1000TE18R3P215TCA3	185
10	230/460	20:1	215TC	TEFC		M1000TE18R3P215TCA4	125
15	230/460	10:1	254TC	TEFC	Yes	M1500TE18R3P254TCA3	310

* With Removable Feet

Use washdown or motors with a drip cover for outside installations.

If operating under 6 HZ (greater than 10:1 turndown ratio) consult factory.

3600 rpm Inverter Duty - 3 Phase

HP	Voltage	Turndown Ratio	Frame	Enclosure	Drip Cover	Part Number	Weight (lbs.)
1	230/460	10:1	56C	TEFC		M100TE36R3P56CA3	34
1	230/460	1000:1	56C	Washdown/TENV		M100WD36R3P56CA5	34
1	230/460	10:1	143TC	TEFC	Yes	M100TE36R3P143TCA3	59
1-1/2	230/460	10:1	143TC	TEFC	Yes	M150TE36R3P143TCA3	59
2	230/460	10:1	145TC	TEFC	Yes	M200TE36R3P145TCA3	65
3	230/460	20:1	145TC	TEFC	Yes	M300TE36R3P145TCA4	53
3	230/460	10:1	182TC	TEFC	Yes	M300TE36R3P182TCA3	100
5	230/460	10:1	184TC	TEFC	Yes	M500TE36R3P184TCA3	120
7-1/2	230/460	10:1	213TC	TEFC	Yes	M750TE36R3P213TCA3	175
10	230/460	10:1	215TC	TEFC	Yes	M1000TE36R3P215TCA3	198
15	230/460	10:1	254TC	TEFC	Yes	M1500TE36R3P254TCA3	310

Use washdown or motors with a drip cover for outside installations.

If operating under 6 HZ (greater than 10:1 turndown ratio) consult factory.

Explosion-proof Motors

Consult the National Electric Code and your local regulations for proper selection of motors in hazardous locations.

Hazardous-duty Location, NEMA 56C, Footed, 3 Phase

HP	RPM	Frame	Part Number	Turndown Ratio (CT)	Enclosure	Voltage/Hz	Weight (lbs.)
1/4	1800	56C	M25EX18F3P56CA5	1000:1	TENV	230-460/60	26
1/2	1800	56C	M50EX18F3P56CA5	1000:1	TENV	230-460/60	31
3/4	1800	56C	M75EX18F3P56CA5	1000:1	TENV	230-460/60	38
1	1800	56C	M100EX18F3P56CA5	1000:1	TENV	230-460/60	43

If operating under 6 HZ (greater than 10:1 turndown ratio) consult factory.

Standard Features:

- Class I and II, Groups C, D, F & G.
- CSA certified.
- UL listed.
- Continuous duty at 104°F (40°C) ambient.

Hazardous-duty Location, NEMA, No Feet, 3 Phase

HP	RPM	Frame	Part Number	Turndown Ratio (CT)	Shipping Weight (lbs.)
1	1800	143TC	M100EX18R3P143TCA2	4:1	68
2	3600	145TC	M200EX36R3P145TCA2	4:1	110
2	1800	145TC	M200EX18R3P145TCA2	4:1	110
3	3600	182TC	M300EX36R3P182TCA2	4:1	150
3	1800	182TC	M300EX18R3P182TCA2	4:1	150
5	3600	184TC	M500EX36R3P184TCA2	4:1	170
5	1800	184TC	M500EX18R3P184TCA2	4:1	160
7.5	3600	213TC	M750EX36R3P213TCA2	4:1	230
7.5	1800	213TC	M750EX18R3P213TCA2	4:1	250
10	3600	215TC	M1000EX36R3P215TCA2	4:1	285
10	1800	215TC	M1000EX18R3P215TCA2	4:1	325

Consult factory if higher turndown ratios are required.

Consult factory if operating above 3,300 ft. (1,006 m) elevation.

Standard Features:

- Totally enclosed fan-cooled, explosion-proof (IP55), premium efficiency, continuous-duty, 230/460V, 60Hz, 3P, 1.15 service factor.
- UL and CSA listed for Class I, Division I, Group C & D and Class II, Groups E, F, G: Temp Code T3B.
- Cast Iron construction.
- UL listed for inverter duty (motor service factor 1.0 when operated with VFD).
- Class "F" insulation with Class "B" rise.

Available with ATEX certification - consult factory.

Control Freak™ Touch-screen Metering Controller

Control Freak™

Control Freak is an exclusive new electronic controller that provides motor speed control for Hydra-Cell Metering Solutions pumps (or Hydra-Cell bare shaft pumps for metering). It features built-in programming and is available in a web-based format or with an easy-to-use touch-screen display.

The user can enter the desired flow rate or volume in gallons or liters and system pressure in psi or bar, and the controller automatically runs the pump manually at the desired flow rate or volume total/time, or in pre-set batches.

This versatile electronic controller allows programming for the flow rate or for totalization of the recent process application as well as the life of the pump.




Start-up menu for the touch-screen model.

Touch-screen Exclusives:

- 7" color graphic touch-screen user interface in a NEMA-4X enclosure - easy to operate and visible in low-light areas.
- Safety features for emergency stop, loss of power and fault monitoring.
- Can control up to six (6) pumps with one Hydra-Cell Control Freak screen - requires additional VFDs and I/O modules.

Performance Features

- Variable Frequency Drive (VFD).
- Pre-set (with password protection) for Hydra-Cell pump performance algorithms - can also be field-calibrated for greater accuracy.
- Input for temperature probe monitoring.
- Pump-drive information screen.
- Four configurable on-off relays.
- Ten separate batch set-up screens per pump.
- Two user-configurable analog input displays.
- Analog and digital I/O for interfacing with external devices.
- One analog input dedicated to a pre-programmed closed loop feedback.
- Includes real-time clock.
- Emergency stop safety feature.
- Versatile - enables programming for flow rate or totalization.

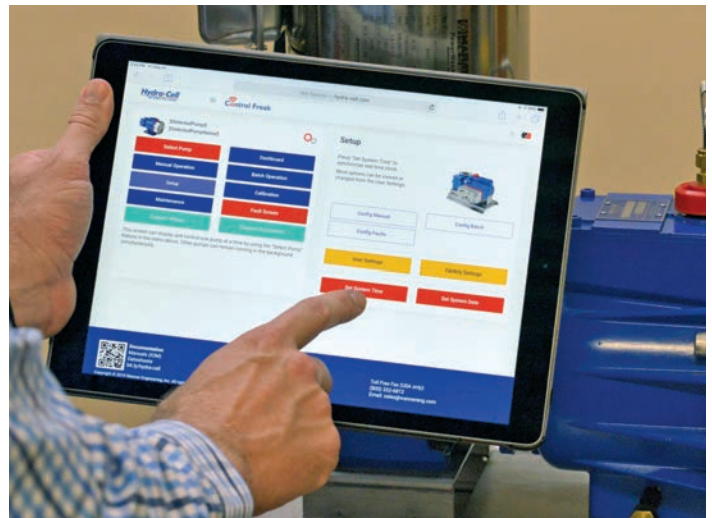

Web-based version operating from a tablet.

Web-based Exclusives:

- Accessible through phone/mobile devices, tablets, laptops, and desktops.
- Can control an unlimited number of Hydra-Cell metering pumps - requires additional VFDs and I/O modules.
- Two-pump proportioning.
- Inputs for leak detection and oil level monitoring.
- Maintenance reminders.
- Updates through thumb drive.

Control Freak Selection Process

Programming Options

- Touch-screen: Includes 7" screen with assembly cable, CAT5e, 7-ft.
- Web-based: For phone/mobile, tablet, and laptop/desktop computers.



Touch-screen shown with required VFD kit.
The Web-based program also uses a VFD kit.

VFD Kits (order one VFD kit for each pump operated by the Control Freak)

Power	Type	Input Voltage/Phase	Output Voltage/Phase
1/2 hp (0.37 kW)	VFD	115 volt/1-phase	230/460 volt/3-phase
1/2 hp (0.37 kW)	VFD	230 volt/1-phase	230/460 volt/3-phase
1 hp (0.75 kW)	VFD	115 volt/1-phase	230/460 volt/3-phase
1 hp (0.75 kW)	VFD	230 volt/1-phase	230/460 volt/3-phase
2 hp (1.5 kW)	VFD	230 volt/1-phase	230/460 volt/3-phase
3 hp (2.2 kW)	VFD	230 volt/1-phase	230/460 volt/3-phase
1/2 hp (0.37 kW)	VFD	230 volt/3-phase	230/460 volt/3-phase
1 hp (0.75 kW)	VFD	230 volt/3-phase	230/460 volt/3-phase
2 hp (1.5 kW)	VFD	230 volt/3-phase	230/460 volt/3-phase
3 hp (2.2 kW)	VFD	230 volt/3-phase	230/460 volt/3-phase
1 hp (0.75 kW)	VFD	460 volt/3-phase	230/460 volt/3-phase
2 hp (1.5 kW)	VFD	460 volt/3-phase	230/460 volt/3-phase
3 hp (2.2 kW)	VFD	460 volt/3-phase	230/460 volt/3-phase

For higher hp or kW, please consult factory.

Each VFD kit includes:

- Appropriate VFD model in chart to left
- I/O Module, Single Pump
- Wiring, I/O Module
- Wiring, Motor, 22 ga., 1-ft., Red
- Wiring, Motor, 22 ga., 1-ft., White
- Cable, CAT5e, 1-ft.

Control Freak Accessories

Accessory	Description
Enclosure (1)	VFD Enclosure for up to 1 hp (0.75 kW)
Probe Kit	Oil Temperature Sensor Probe with Oil Cap
Ball Mount Assembly (2)	Bracket Ball, Ball Mount Hinge, Screw, Nut
Emergency Stop Button (3)	Safety Kit
Cabling	1-ft. CAT5e Cable
Cabling	3-ft. CAT5e Cable
Cabling	7-ft. CAT5e Cable
Cabling	10-ft. CAT5e Cable
Cabling	30-ft. CAT5e Cable

(1) Consult Factory for larger VFDs and for pricing on equipment mounting in enclosure.

(2) Available for Touch-screen model only.

(3) Available as an accessory for Web-based version only; built into Touch-screen model.



Variable Frequency Drives (VFD) and Controllers

Hydra-Cell Metering Solutions pumps feature VFD electronic controllers to regulate the motor speed and strokes-per-minute, providing a flow that is proportional to the motor speed. They are selected based on the motor hp and whether single-phase or three-phase voltage is required.



Selection Process

1. Ensure that the phase and enclosure match your application.
2. Using the appropriate chart below, select the controller hp based on the hp of your motor.
3. Match the output voltage to the output voltage of your motor.
4. Match the input voltage to your electrical source.

1 Phase

HP	Type	Voltage (input/output)	Enclosure	Part Number	Weight (lbs.)
1/2	Sensorless Vector	230 volt / 230 volt	NEMA 1	C50N1-1P3P-230	2.2
1	Sensorless Vector	115 volt / 230 volt	IP-20	C100IP-1P3P-115	3.5
1	Micro AC Inverter	115 volt / 230 volt	NEMA 4	C100N4-1P3P-115	8.0
1	Sensorless Vector	230 volt / 230 volt	NEMA 1	C100N1-1P3P-230	2.2
1	Sensorless Vector	230 volt / 230 volt	NEMA 4	C100N4-1P3P-230	8.0
2	Sensorless Vector	230 volt / 230 volt	NEMA 1	C200N1-1P3P-230	4.4
3	Sensorless Vector	230 volt / 230 volt	NEMA 1	C300N1-1P3P-230	4.4

3 Phase

HP	Type	Voltage (input/output)	Enclosure	Part Number	Weight (lbs.)
1/2	Sensorless Vector	230 volt / 230 volt	NEMA 1	C50N1-3P3P-230	2.2
1	Sensorless Vector	230 volt / 230 volt	NEMA 1	C100N1-3P3P-230	2.2
2	Sensorless Vector	230 volt / 230 volt	NEMA 1	C200N1-3P3P-230	4.4
2	Sensorless Vector	230 volt / 230 volt	NEMA 4	C200N4-3P3P-230	14.0
3	Sensorless Vector	230 volt / 230 volt	NEMA 1	C300N1-3P3P-230	4.4
5	Sensorless Vector	230 volt / 230 volt	NEMA 1	C500N1-3P3P-230	5.0
7-1/2	Sensorless Vector	230 volt / 230 volt	NEMA 1	C750N1-3P3P-230	13.0
10	Sensorless Vector	230 volt / 230 volt	NEMA 1	C1000N1-3P3P-230	13.0
1	Sensorless Vector	460 volt / 460 volt	NEMA 1	C100N1-3P3P-460	2.2
1	Sensorless Vector	460 volt / 460 volt	NEMA 4	C100N4-3P3P-460	13.0
2	Sensorless Vector	460 volt / 460 volt	NEMA 1	C200N1-3P3P-460	2.2
2	Sensorless Vector	460 volt / 460 volt	NEMA 4	C200N4-3P3P-460	14.0
3	Sensorless Vector	460 volt / 460 volt	NEMA 1	C300N1-3P3P-460	4.4
5	Sensorless Vector	460 volt / 460 volt	NEMA 1	C500N1-3P3P-460	4.4
7-1/2	Sensorless Vector	460 volt / 460 volt	NEMA 1	C750N1-3P3P-460	14.0
10	Sensorless Vector	460 volt / 460 volt	NEMA 1	C1000N1-3P3P-460	14.0
15	Sensorless Vector	460 volt / 460 volt	NEMA 1	C1500N1-3P3P-460	14.0
20	Sensorless Vector	460 volt / 460 volt	NEMA 1	C2000N1-3P3P-460	28.0
30	Sensorless Vector	460 volt / 460 volt	NEMA 1	C3000N1-3P3P-460	30.0

Calibration Cylinders

The calibration cylinder verifies the flow rate of your Hydra-Cell metering pump, providing a visual indicator that your system is operating within the required parameters for performance and accuracy.

Available in PVC and glass, calibration cylinders are selected based on cylinder capacity needed (gph or lph) as determined by the maximum shaft rpm of your pump. Models are available for both NPT and BSPT ports.

Selection Process


1. Size the appropriate model pump to the application (refer to pump specifications for complete information).
2. Use the application rpm to select the appropriate cylinder from the chart below.



Cylinder Size						
mL	30	200	300	1000	2000	10000
Capacity						
gph	0.95	6.4	9.5	32	64	320
lph	3.6	24	36	120	240	1200
Pump Model*	Maximum Pump Shaft (rpm)					
MT8	36	250	360	-	-	-
P100 (F20)	30	180	250	1000	1750	-
P200 (M03)	-	60	90	300	600	1750
P300 (D04)	-	60	90	300	600	1750
P400 (D10)	-	30	40	110	210	1000
P500 (D15)	-	-	-	60	115	600
P600 (H25)	-	-	-	30	60	275

* Corresponding Bare Shaft Pump model from page 51 of Hydra-Cell Metering Solutions catalog shown in parentheses.

Port C	Cylinder Size (mL)	Part Number		Dimensions - in (mm)	
		NPT Ports	BSPT Ports	A	B
PVC Cylinders					
1/2"	200	111-001	111-001-B	19.0 (482.6)	1.5 (38.1)
1/2"	300	111-002	111-002-B	13.0 (330.2)	2.2 (55.9)
3/4"	1000	111-003	111-003-B	22.0 (558.8)	2.5 (63.5)
1"	2000	111-004	111-004-B	20.0 (508.0)	3.7 (94.0)
2"	10000	111-006	111-006-B	25.0 (635.0)	6.95 (176.5)
Glass Cylinders					
1/4"	30	111-010	111-010-B	14.0 (355.6)	1.4 (35.6)
1/2"	200	111-011	111-011-B	21.0 (533.4)	2.5 (63.5)
3/4"	1000	111-013	111-013-B	27.0 (685.8)	3.5 (88.9)
1"	2000	111-014	111-014-B	27.0 (685.8)	5.0 (127.0)

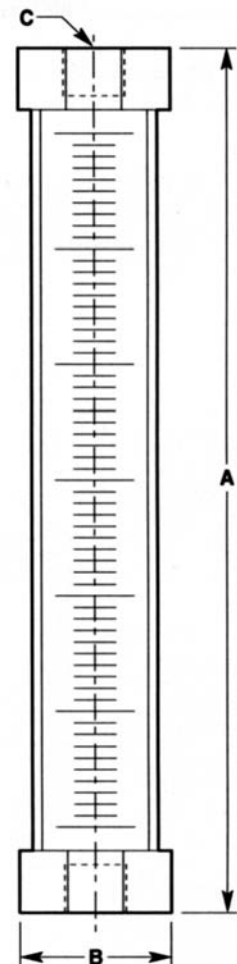


Back Pressure and Pressure Relief Valves

Back pressure valves help ensure that your Hydra-Cell metering pump provides accurate and predictable flow. Pressure relief valves protect your pump and system from over-pressurized situations.

Available in a choice of wetted materials with PTFE diaphragms, pressure valves are selected according to the valve port size needed for the appropriate maximum flow (gph or lph) of your Hydra-Cell metering pump. Models are available for both NPT and BSPT ports.



Dimensions and Port Configurations

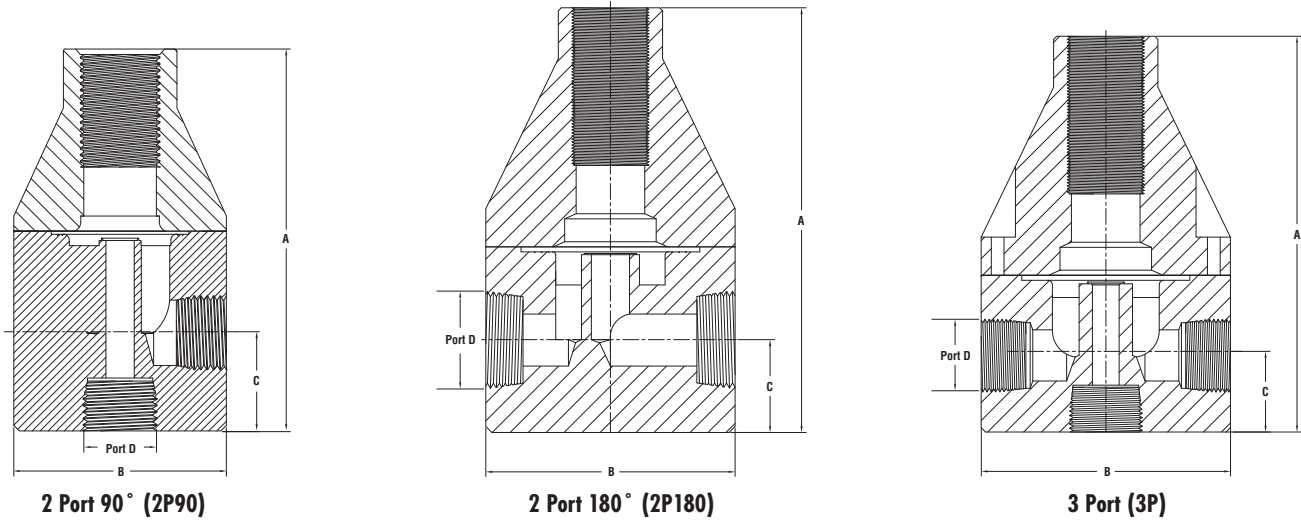

Material	Port D	A		B		C	
		in	mm	in	mm	in	mm
Polypropylene/PVDF	3/8" (DN 10) LoFlo	3.55	90.2	2.35	59.7	0.75	19.1
	1/2" (DN 15) LoFlo	4.25	108.0	2.35	59.7	1.08	27.4
	3/4" (DN 20)	5.56	141.2	3.50	88.9	1.125	28.6
	1" (DN 25) StdFlo	5.86	148.8	3.50	88.9	1.25	31.8
	1" (DN 25) HiFlo	7.25	184.2	4.90	124.5	1.25	31.8
	2" (DN 50) StdFlo	8.90	226.1	4.90	124.5	2.15	54.6
316 SST	1/4" (DN 8) High Pressure	4.25	108.0	2.35	59.7	1.08	27.4
	1/4" (DN 8) Super High Pressure (HP)	4.72	119.9	2.375	60.3	1.08	27.4
	3/8" (DN 10) LoFlo	3.55	90.2	2.35	59.7	0.75	19.1
	3/8" (DN 10) High Pressure	4.25	108.0	2.35	59.7	1.08	27.4
	1/2" (DN 15) LoFlo	4.25	108.0	2.35	59.7	1.08	27.4
	1/2" (DN 15) High Pressure	4.25	108.0	2.35	59.7	1.08	27.4
	1/2" (DN 15) Super High Pressure (HP)	4.72	119.9	2.375	60.3	1.08	27.4
	3/4" (DN 20)	5.56	141.2	3.50	88.9	1.125	28.6
	1" (DN 25) StdFlo	5.86	148.8	3.50	88.9	1.25	31.8
	1" (DN 25) HiFlo	7.25	184.2	4.90	124.5	1.25	31.8
	1" (DN 25) High Pressure	5.90	149.9	3.50	88.9	1.25	31.8
	2" (DN 50) StdFlo	8.90	226.1	4.90	124.5	2.15	54.6
Hastelloy C	1/4" (DN 8) High Pressure	4.25	108.0	2.35	59.7	1.08	27.4
	1/4" (DN 8) Super High Pressure (HP)	4.72	119.9	2.375	60.3	1.08	27.4
	3/8" (DN 10) LoFlo	3.55	90.2	2.35	59.7	0.75	19.1
	3/8" (DN 10) High Pressure	4.25	108.0	2.35	59.7	1.08	27.4
	1/2" (DN 15) LoFlo	4.25	108.0	2.35	59.7	1.08	27.4
	1/2" (DN 15) High Pressure	4.25	108.0	2.35	59.7	1.08	27.4
	1/2" (DN 15) Super High Pressure (HP)	4.72	119.9	2.375	60.3	1.08	27.4
	3/4" (DN 20)	5.56	141.2	3.50	88.9	1.125	28.6
	1" (DN 25) StdFlo	5.86	148.8	3.50	88.9	1.25	31.8
	1" (DN 25) HiFlo	7.25	184.2	4.90	124.5	1.25	31.8
	1" (DN 25) High Pressure	5.90	149.9	3.50	88.9	1.25	31.8
	2" (DN 50) StdFlo	8.90	226.1	4.90	124.5	2.15	54.6

* 3/4" (DN 20) dimensions apply to StdFlo, HiFlo, and High Pressure models.

Back Pressure Valves

Selection Process

1. Use the Valve Port Size “D” chart below to determine the valve port size with the appropriate maximum flow rate to match the Hydra-Cell pump selected: gpm and l/min are Continuous Flow; gph and lph are Pulsating Flow.

2. For Back Pressure Valves, use the chart on this page to select the appropriate valve. For Pressure Relief Valves, use the chart on the following page.

(Note: The maximum flow rates are guidelines. Consult factory for specific recommendations.)

Valve Port Size “D”

		LoFlo		StdFlo			HiFlo		High Pressure		Super High Pressure
		3/8" (DN 10)	1/2" (DN 15)	3/4" (DN 20)	1" (DN 25)	2" (DN 50)	3/4" (DN 20)	1" (DN 25)	1/4"-3/8"-1/2" (DN 8/DN 10/DN 15)	3/4"-1" (DN 20/DN 25)	1/4"-1/2" (DN 8/DN 10)
Continuous	gpm	10	15	21	26	120	30	54	35	60	56
	l/min	37	57	80	98	454	114	204	132	227	212
Pulsating	gph	200	260	300	500	2350	600	1000	700	1200	1050
	lph	757	984	1135	1890	8892	2271	3785	2650	4542	3975

Pulsating recommended for single-diaphragm P100.

Port “D”	Wetted Materials*	Pressure Adjustment Range		Maximum Temperature		Port Configuration	Part Number	
		psi	bar	°F	°C		NPT Ports	BSPT Ports
3/8" (DN 10) LoFlo	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-101	111-101-B
	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-103	111-103-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-106	111-106-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-110	111-110-B
	316 SST	50 - 350	3.5 - 24	300	149	2P180	111-107	111-107-B
1/2" (DN 15) LoFlo	Hastelloy C	50 - 350	3.5 - 24	300	149	2P180	111-111	111-111-B
	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-121	111-121-B
	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-123	111-123-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-126	111-126-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-130	111-130-B
3/4" (DN 20) StdFlo	316 SST	50 - 350	3.5 - 24	300	149	2P180	111-127	111-127-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	2P180	111-131	111-131-B
	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-341	111-341-B
	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-343	111-343-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-346	111-346-B
1" (DN 25) StdFlo	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-350	111-350-B
	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-261	111-261-B
	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-263	111-263-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-266	111-266-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-270	111-270-B
1" (DN 25) HiFlo	316 SST	50 - 350	3.5 - 24	300	149	2P180	111-267	111-267-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	2P180	111-271	111-271-B
	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-361	111-361-B
	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-363	111-363-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-366	111-366-B
2" (DN 50) StdFlo	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-370	111-370-B
	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-281	111-281-B
	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-283	111-283-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-286	111-286-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-290	111-290-B
2" (DN 50) StdFlo	316 SST	50 - 350	3.5 - 24	300	149	2P180	111-287	111-287-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	2P180	111-291	111-291-B

* Diaphragm material is PTFE on all models. Other materials available on request.

Pressure Relief Valves

Port "D"	Wetted Materials*	Pressure Adjustment Range		Maximum Temperature		Port Configuration	Part Number	
		psi	bar	°F	°C		NPT Ports	BSPT Ports
1/4" (DN 8)	316 SST	350 - 2500	24 - 172	300	149	2P90	111-800	111-800-B
High Pressure	Hastelloy C	350 - 2500	24 - 172	300	149	2P90	111-804	111-804-B
1/4" (DN 8)	316 SST	1000 - 4000	69 - 275	300	149	2P90	111-780	111-780-B
Super HP	Alloy 20	1000 - 4000	69 - 275	300	149	2P90	111-781	111-781-B
	Hastelloy C	1000 - 4000	69 - 275	300	149	2P90	111-782	111-782-B
3/8" (DN 10)	Polypropylene	10 - 150	0.7 - 10.3	195	90	3P	111-401	111-401-B
LoFlo	PVDF	10 - 150	0.7 - 10.3	300	149	3P	111-403	111-403-B
	316 SST	10 - 150	0.7 - 10.3	300	149	3P	111-406	111-406-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	3P	111-410	111-410-B
	316 SST	50 - 350	3.5 - 24	300	149	3P	111-407	111-407-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	3P	111-411	111-411-B
3/8" (DN 10)	316 SST	350 - 2500	24 - 172	300	149	2P90	111-706	111-706-B
High Pressure	Hastelloy C	350 - 2500	24 - 172	300	149	2P90	111-710	111-710-B
1/2" (DN 15)	Polypropylene	10 - 150	0.7 - 10.3	195	90	3P	111-421	111-421-B
LoFlo	PVDF	10 - 150	0.7 - 10.3	300	149	3P	111-423	111-423-B
	316 SST	10 - 150	0.7 - 10.3	300	149	3P	111-426	111-426-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	3P	111-430	111-430-B
	316 SST	50 - 350	3.5 - 24	300	149	3P	111-427	111-427-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	3P	111-431	111-431-B
1/2" (DN 15)	316 SST	350 - 2500	24 - 172	300	149	2P90	111-726	111-726-B
High Pressure	Hastelloy C	350 - 2500	24 - 172	300	149	2P90	111-730	111-730-B
1/2" (DN 15)								
Super HP	316 SST	1000 - 4000	69 - 275	300	149	2P90	111-783	111-783-B
3/4" (DN 20)	Polypropylene	10 - 150	0.7 - 10.3	195	90	3P	111-541	111-541-B
StdFlo	PVDF	10 - 150	0.7 - 10.3	300	149	3P	111-543	111-543-B
	316 SST	10 - 150	0.7 - 10.3	300	149	3P	111-546	111-546-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-550	111-550-B
	316 SST	50 - 350	3.5 - 24	300	149	2P180	111-547	111-547-B
3/4" (DN 20)	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-641	111-641-B
HiFlo	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-643	111-643-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-646	111-646-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-650	111-650-B
3/4" (DN 20)	316 SST	350 - 2500	24 - 172	300	149	2P90	111-746	111-746-B
High Pressure	Hastelloy C	350 - 2500	24 - 172	300	149	2P90	111-750	111-750-B
1" (DN 25)	Polypropylene	10 - 150	0.7 - 10.3	195	90	3P	111-561	111-561-B
StdFlo	PVDF	10 - 150	0.7 - 10.3	300	149	3P	111-563	111-563-B
	316 SST	10 - 150	0.7 - 10.3	300	149	3P	111-566	111-566-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-570	111-570-B
	316 SST	50 - 350	3.5 - 24	300	149	3P	111-567	111-567-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	2P180	111-571	111-571-B
1" (DN 25)	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P180	111-661	111-661-B
HiFlo	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-663	111-663-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-666	111-666-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-670	111-670-B
1" (DN 25)	316 SST	350 - 2500	24 - 172	300	149	2P90	111-766	111-766-B
High Pressure	Hastelloy C	350 - 2500	24 - 172	300	149	2P90	111-770	111-770-B
2" (DN 50)	Polypropylene	10 - 150	0.7 - 10.3	195	90	2P90	111-581	111-581-B
StdFlo	PVDF	10 - 150	0.7 - 10.3	300	149	2P180	111-583	111-583-B
	316 SST	10 - 150	0.7 - 10.3	300	149	2P180	111-586	111-586-B
	Hastelloy C	10 - 150	0.7 - 10.3	300	149	2P180	111-590	111-590-B
	316 SST	50 - 350	3.5 - 24	300	149	2P180	111-587	111-587-B
	Hastelloy C	50 - 350	3.5 - 24	300	149	2P180	111-591	111-591-B

* Diaphragm material is PTFE on all models. Other materials available on request.

Pulsation Dampeners

Pulsation dampeners protect your pumping system and its components by removing virtually all hydraulic shock and vibration resulting from the reciprocating stroking action of a positive displacement pump.

Available in a variety of housing construction and bladder materials to cover different applications, pulsation dampeners are selected based on the size of the dampener (in cubic inches) needed to match your Hydra-Cell Metering Solutions pump model and discharge pulsation.

Since Hydra-Cell multiple-diaphragm model pumps provide smooth, linear, virtually pulse-free flow, pulsation dampeners are optional, except for the single-diaphragm P100 models, for which they are recommended.



Selection Process

Determine application

- Discharge pulsation <1000 psi or >1000 psi (<69 bar or >69 bar)
- Inlet stabilization:
 - For flooded suction, use “Chargeable.”
 - For suction lift, use “J Style.”

Select dampener size (cu. in. volume)

Based on the Hydra-Cell Metering Solutions pump model and application, select the appropriate cubic inch size from the chart at right.

Select dampener model

Use the appropriate dampener size chart on pages 16 to 19 to select the specific model with the desired housing materials, bladder material, and pressure and temperature performance. (Consult factory for special order units with other construction materials and temperature limits.)

Air Control Pump Model	Application			
	Discharge Pulsation		Inlet Stabilization	
	Chargeable <1000 psi <69 bar	Chargeable >1000 psi >69 bar	Chargeable Flooded Suction	“J” Style Suction Lift
MT8	4 or 8 cu. in.	8 or 12 cu. in.	N/A	N/A
P100 (F20)	4 cu. in.	8 or 12 cu. in.	10 cu. in.	10 cu. in.
P200 (M03)	4 cu. in.	8 or 12 cu. in.	10 cu. in.	10 cu. in.
P300 (D04)	4 cu. in.	8 or 12 cu. in.	10 cu. in.	10 cu. in.
P400 (D10)	4 cu. in.	8 or 12 cu. in.	10 cu. in.	10 cu. in.
P500 (D15)	4 cu. in.	8 or 12 cu. in.	10 cu. in.	10 cu. in.
P600 (H25)	36 cu. in.	N/A	36 cu. in.	85 cu. in.

Notes:

These are minimum size recommendations; a larger size can always be used. Pump Models in parentheses are for corresponding Bare Shaft Pumps as described in the Hydra-Cell Metering Solutions Catalog (page 51).

Bladder Options

Bladder Material	Application Recommendations
Buna-N	Good flex life; use with petroleum, solvents, and oil-based fluids
Neoprene	Good abrasion resistance and flex; use with moderate chemicals
EPDM	Good for extreme cold; good chemical resistance with ketones, caustics
FKM	Good for hot and aggressive fluids; use with aromatics, solvents, acids, and oils
PTFE	Bellows design, excellent flex life; use with highly aggressive fluids
CSM	Excellent abrasion resistance; use with aggressive acids

4 Cubic Inch Dampeners: Inlet 1/2" (female) Standard Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
SST	Buna-N	4	1000	69	110-060	110-060-B
SST	Neoprene	4	1000	69	110-062	110-062-B
SST	EPDM	4	1000	69	110-063	110-063-B
SST	FKM	4	1000	69	110-065	110-065-B
SST	PTFE	4	600	41.4	110-068	110-068-B
Hastelloy C	Buna-N	4	1000	69	110-090	110-090-B
Hastelloy C	Neoprene	4	1000	69	110-092	110-092-B
Hastelloy C	EPDM	4	1000	69	110-093	110-093-B
Hastelloy C	FKM	4	1000	69	110-095	110-095-B
Hastelloy C	PTFE	4	600	41.4	110-098	110-098-B
Polypropylene	Buna-N	4	150	10.3	110-999	110-999-B
Polypropylene	Neoprene	4	150	10.3	110-101	110-101-B
Polypropylene	EPDM	4	150	10.3	110-104	110-104-B
Polypropylene	FKM	4	150	10.3	110-106	110-106-B
Polypropylene	PTFE	4	150	10.3	110-109	110-109-B
PVDF	Buna-N	4	150	10.3	110-020	110-020-B
PVDF	Neoprene	4	150	10.3	110-022	110-022-B
PVDF	EPDM	4	150	10.3	110-023	110-023-B
PVDF	FKM	4	150	10.3	110-026	110-026-B
PVDF	PTFE	4	150	10.3	110-028	110-028-B

6 Cubic Inch Dampeners: Inlet 1/2" (female) Standard Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
PVC	EPDM	6	150	10.3	110-400	110-400-B
PVC	CSM	6	150	10.3	110-401	110-401-B
PVC	FKM	6	150	10.3	110-402	110-402-B
Polypropylene	EPDM	6	150	10.3	110-403	110-403-B
Polypropylene	CSM	6	150	10.3	110-404	110-404-B
Polypropylene	FKM	6	150	10.3	110-405	110-405-B
PVDF	EPDM	6	150	10.3	110-406	110-406-B
PVDF	CSM	6	150	10.3	110-407	110-407-B
PVDF	FKM	6	150	10.3	110-408	110-408-B

7.5 Cubic Inch Dampeners: Inlet 1/2" (female) Standard Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
316 SS	EPDM	7.5	250	17.2	110-420	110-420-B
316 SS	CSM	7.5	250	17.2	110-421	110-421-B
316 SS	FKM	7.5	250	17.2	110-422	110-422-B
316 SS	PTFE	7.5	250	17.2	110-423	110-423-B
Alloy 20	EPDM	7.5	250	17.2	110-424	110-424-B
Alloy 20	CSM	7.5	250	17.2	110-425	110-425-B
Alloy 20	FKM	7.5	250	17.2	110-426	110-426-B
Alloy 20	PTFE	7.5	250	17.2	110-427	110-427-B
Hastelloy C	EPDM	7.5	250	17.2	110-428	110-428-B
Hastelloy C	CSM	7.5	250	17.2	110-429	110-429-B
Hastelloy C	FKM	7.5	250	17.2	110-430	110-430-B
Hastelloy C	PTFE	7.5	250	17.2	110-431	110-431-B

10 Cubic Inch Dampeners: Inlet 1/2" (female) Standard Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
SST	Buna-N	10	1000	69	110-260	110-260-B
SST	Neoprene	10	1000	69	110-262	110-262-B
SST	EPDM	10	1000	69	110-263	110-263-B
SST	FKM	10	1000	69	110-265	110-265-B
SST	PTFE	10	150	10.3	110-268	110-268-B
Hastelloy C	Buna-N	10	1000	69	110-290	110-290-B
Hastelloy C	Neoprene	10	1000	69	110-292	110-292-B
Hastelloy C	EPDM	10	1000	69	110-293	110-293-B
Hastelloy C	FKM	10	1000	69	110-295	110-295-B
Hastelloy C	PTFE	10	150	10.3	110-298	110-298-B
Polypropylene	Buna-N	10	150	10.3	110-100	110-100-B
Polypropylene	Neoprene	10	150	10.3	110-232	110-232-B
Polypropylene	EPDM	10	150	10.3	110-233	110-233-B
Polypropylene	FKM	10	150	10.3	110-105	110-105-B
Polypropylene	PTFE	10	150	10.3	110-108	110-108-B
PVDF	Buna-N	10	150	10.3	110-220	110-220-B
PVDF	Neoprene	10	150	10.3	110-222	110-222-B
PVDF	EPDM	10	150	10.3	110-223	110-223-B
PVDF	FKM	10	150	10.3	110-225	110-225-B
PVDF	PTFE	10	150	10.3	110-228	110-228-B

15 Cubic Inch Dampeners: Inlet 1/2" (female) Standard Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
PVC	EPDM	15	150	10.3	110-440	110-440-B
PVC	CSM	15	150	10.3	110-441	110-441-B
PVC	FKM	15	150	10.3	110-442	110-442-B
PVC	PTFE	15	150	10.3	110-443	110-443-B
Polypropylene	EPDM	15	150	10.3	110-444	110-444-B
Polypropylene	CSM	15	150	10.3	110-445	110-445-B
Polypropylene	FKM	15	150	10.3	110-446	110-446-B
Polypropylene	PTFE	15	150	10.3	110-447	110-447-B
PVDF	EPDM	15	150	10.3	110-448	110-448-B
PVDF	CSM	15	150	10.3	110-449	110-449-B
PVDF	FKM	15	150	10.3	110-450	110-450-B
PVDF	PTFE	15	150	10.3	110-451	110-451-B
316 SS	EPDM	15	250	17.2	110-460	110-460-B
316 SS	CSM	15	250	17.2	110-461	110-461-B
316 SS	FKM	15	250	17.2	110-462	110-462-B
316 SS	PTFE	15	250	17.2	110-463	110-463-B
Alloy 20	EPDM	15	250	17.2	110-464	110-464-B
Alloy 20	CSM	15	250	17.2	110-465	110-465-B
Alloy 20	FKM	15	250	17.2	110-466	110-466-B
Alloy 20	PTFE	15	250	17.2	110-467	110-467-B
Hastelloy C	EPDM	15	250	17.2	110-468	110-468-B
Hastelloy C	CSM	15	250	17.2	110-469	110-469-B
Hastelloy C	FKM	15	250	17.2	110-470	110-470-B
Hastelloy C	PTFE	15	250	17.2	110-471	110-471-B

36 Cubic Inch Dampeners: Inlet 1/2" (female) Standard Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
SST	Buna-N	36	1000	69	110-660	110-660-B
SST	Neoprene	36	1000	69	110-662	110-662-B
SST	EPDM	36	1000	69	110-663	110-663-B
SST	FKM	36	1000	69	110-665	110-665-B
SST	PTFE	36	600	41.4	110-668	110-668-B
CS	Buna-N	36	1000	69	110-640	110-640-B
CS	Neoprene	36	1000	69	110-642	110-642-B
CS	EPDM	36	1000	69	110-643	110-643-B
CS	FKM	36	1000	69	110-645	110-645-B
CS	PTFE	36	600	41.4	110-648	110-648-B
Hastelloy C	Buna-N	36	1000	69	110-690	110-690-B
Hastelloy C	Neoprene	36	1000	69	110-692	110-692-B
Hastelloy C	EPDM	36	1000	69	110-693	110-693-B
Hastelloy C	FKM	36	1000	69	110-695	110-695-B
Hastelloy C	PTFE	36	600	41.4	110-698	110-698-B
Polypropylene	Buna-N	36	150	10.3	110-600	110-600-B
Polypropylene	Neoprene	36	150	10.3	110-602	110-602-B
Polypropylene	EPDM	36	150	10.3	110-603	110-603-B
Polypropylene	FKM	36	150	10.3	110-605	110-605-B
Polypropylene	PTFE	36	150	10.3	110-608	110-608-B
PVDF	Buna-N	36	150	10.3	110-620	110-620-B
PVDF	Neoprene	36	150	10.3	110-622	110-622-B
PVDF	EPDM	36	150	10.3	110-623	110-623-B
PVDF	FKM	36	150	10.3	110-625	110-625-B
PVDF	PTFE	36	150	10.3	110-628	110-628-B

8 Cubic Inch Dampeners: Inlet (female) High Pressure Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
SST	PTFE	8	4000	275	110-049*	110-049-B*
SST	FKM	8	4000	275	110-050*	110-050-B*
SST	FKM	8	4000	275	110-051	110-051-B
SST	PTFE	8	4000	275	110-052	110-052-B

*2-port, flow-through inlet design

12 Cubic Inch Dampeners: Inlet 1/2" (female) High Pressure Models

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
SST	Buna-N	12	4000	275	110-370	110-370-B
SST	EPDM	12	4000	275	110-373	110-373-B
SST	FKM	12	4000	275	110-375	110-375-B
SST	PTFE	12	2000	138	110-368	110-368-B
SST	FKM	12	4000	275	110-377	110-377-B
SST	PTFE	12	4000	275	110-378	110-378-B
SST	FKM	12	4000	275	110-379*	110-379-B*
SST	PTFE	12	4000	275	110-380*	110-380-B*

*2-port, flow-through inlet design

10 Cubic Inch Inlet Stabilizers with J-Style Control: Inlet 1/2" (female)

Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
CPVC	Buna-N	10	30	2	110-210-J	110-210-J-B
CPVC	Neoprene	10	30	2	110-212-J	110-212-J-B
CPVC	EPDM	10	30	2	110-213-J	110-213-J-B
CPVC	FKM	10	30	2	110-215-J	110-215-J-B
CPVC	PTFE	10	30	2	110-218-J	110-218-J-B

85 Cubic Inch Inlet Stabilizers with J-Style Control: Inlet 1" (female)


Wetted	Bladder	Volume (Inch ³)	Maximum Pressure		Part Number	
			psi	bar	NPT Ports	BSPT Ports
PVC	Buna-N	85	30	2	110-710-J	110-710-J-B
PVC	Neoprene	85	30	2	110-712-J	110-712-J-B
PVC	EPDM	85	30	2	110-713-J	110-713-J-B
PVC	FKM	85	30	2	110-715-J	110-715-J-B
PVC	PTFE	85	30	2	110-718-J	110-718-J-B

Pulsation Dampener Charging Kits

Part Number	Description
110-900	Pulsation Dampener Charging Kit to 999 psi (68.9 bar)
110-901	Pulsation Dampener Charging Kit 1000 to 5000 psi (69 to 345 bar)
110-905	Pulsation Dampener Charging Kit for 110-4** Models

Other Services and Support

Demonstration (Cutaway) Units

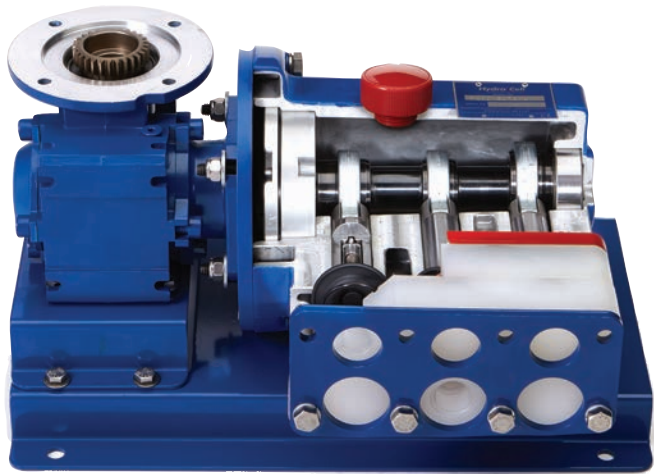

Description	Part Number
P200 Cutaway Demo with Rolling Carry Case	CUTAWAY-P200WCASE
P200 Cutaway Demo without Case	CUTAWAY-P200
Cutaway Demo Rolling Case Only	CUTAWAY-CASE

System Components

If needed, we can also deliver your Hydra-Cell Metering Solutions pumping system with all necessary strainers, suction accumulators, gauges, and other components.

Priming Kits and Plugs

A vacuum priming kit is available for use after diaphragm replacement, and PVC priming plugs are used for priming the hydraulic cells in Hydra-Cell pumps equipped with patented Kel-Cell Diaphragm Position Control technology (models P400 and P600).

Replacement Parts Kits and Tool Kits

Replacement Parts Kits are available for each P Series metering pump model, MT8 pumps, and Hydra-Cell bare shaft pumps for metering. Complete tool kits are also available customized to the specific pump model.

Factory Services

OEM paint and nameplate customization, drawing packages, and other special services are available.



Testing

Wanner Engineering has a fully-equipped testing facility to perform a variety of witnessed and non-witnessed tests with certification for Hydra-Cell Metering Solutions pumps.



Part Number	Description	Notes
TEST-STDPROD	Standard Production Tests	Rated Flow, Rated Pressure, & Steady State Accuracy
TEST-STDPRODWIT	Witnessed Standard Production Tests	Rated Flow, Rated Pressure, & Steady State Accuracy
TEST-HYDRO	Hydrostatic Test & Certificate	Includes Standard Production Tests
TEST-HYDROWIT	Witnessed Hydrostatic Test & Certificate	Includes Standard Production Tests
TEST-STDLIN	API 675 Linearity Test (5-point curve)	Includes Standard Production Tests
TEST-STDLINWIT	Witnessed API 675 Linearity Test (5-point curve)	Includes Standard Production Tests
TEST-STDLINREP	API 675 Repeatability Test (10-point curve)	Includes Standard Production Tests & API 675 Linearity Test
TEST-STDLINREPWIT	Witnessed API 675 Repeatability Test (10-point curve)	Includes Standard Production Tests & API 675 Linearity Test
TEST-STDHYDAPI	API 675 Test Package	Standard Production Tests, Linearity, Repeatability, & Hydrostatic
TEST-STDHYDAPIWIT	Witnessed API 675 Test Package	Standard Production Tests, Linearity, Repeatability, & Hydrostatic



Hydra-Cell® Limited Warranty

Wanner Engineering, Inc. (WEI) warrants that, for a period of one (1) year from the date of purchase, equipment supplied or manufactured by WEI shall be free of defects in materials and workmanship under normal use and service, and provided the equipment is installed, operated and maintained in accordance with instructions supplied by WEI.

Notwithstanding anything to the contrary, this limited warranty does not cover:

1. Normal wear and/or damage caused by or related to abrasion, corrosion, abuse, negligence, accident, faulty installation, or tampering which impairs normal operation of the equipment.
2. Electric motors (if applicable) not manufactured by WEI. The warranties, if any, on such equipment are assigned to the Purchaser by WEI (without recourse) at the time of purchase.
3. Transportation costs.

Purchaser's sole and exclusive remedy and WEI's sole liability, whether based upon warranty, contract or tort, including negligence, is limited to WEI's repair or replacement of the defective part, at WEI's sole option.

Any claim regarding breach of warranty must be received by WEI before the expiration of the warranty period and by written notice from Purchaser of such defect within thirty (30) days from the discovery thereof. WEI requires the return to a designated WEI location, of the defective part, transportation prepaid, to establish Purchaser's claim. No allowance will be made for repairs undertaken without WEI's written consent or approval.

WEI's warranty obligations and Purchaser's remedies thereunder are solely and exclusively as stated herein.

There are no other warranties, whether oral, written, express, implied or statutory, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose, warranties of non-infringement, warranties arising from course of dealing or usage of trade or any other matter.

Any descriptions of the equipment drawings, specifications, and any samples, models, bulletins, or similar material used in connection with the sale of equipment are for the sole purpose of identifying the equipment and are not to be construed as an express warranty that the equipment will conform to such description. Any field advisory or installation support is advisory only.

Every form of liability for direct, special, incidental or consequential damages or loss is expressly excluded and denied. All liability of WEI shall terminate one (1) year from the date of purchase of the equipment.

Hydra-Cell® Worldwide Sales and Service



Hydra-Cell pumps are sold and serviced worldwide by a comprehensive network of factory-trained pump distributors. As specialists in pump technologies, our distributor organizations offer you a vital local resource for technical expertise, product training, sales and service.

Hydra-Cell distributors are located in more than 70 countries worldwide. In North America specifically, there are more than 100 Hydra-Cell distributor locations to provide local availability for every major commercial, institutional, industrial, and municipal marketplace.

World Headquarters & Manufacturing

★ Minneapolis, Minnesota, USA

Business Units

- ☀ Wichita Falls, Texas, USA
- ☀ Hampshire, United Kingdom
- ☀ Kowloon, Hong Kong
- ☀ Shanghai, China
- ☀ São Paulo, Brazil

Contact us for the name and location of the authorized Hydra-Cell distributor nearest you:

Algeria	Colombia	India	Mongolia	Russia	Thailand
Argentina	Costa Rica	Indonesia	Morocco	Saudi Arabia	Tunisia
Australia	Czech Republic	Ireland	Netherlands	Serbia	Turkey
Austria	Denmark	Israel	New Zealand	Singapore	Ukraine
Azerbaijan	Ecuador	Italy	Norway	Slovakia	United Arab Emirates
Belarus	Egypt	Japan	Oman	Slovenia	United Kingdom
Belgium	Estonia	Kazakhstan	Panama	South Africa	United States
Bolivia	Finland	Kuwait	Peru	South East Asia	Uruguay
Brazil	France	Latvia	Poland	South Korea	Venezuela
Bulgaria	Germany	Lithuania	Portugal	Spain	Viet Nam
Canada	Greece	Luxembourg	Puerto Rico	Sweden	Yemen
Chile	Hong Kong	Malaysia	Qatar	Switzerland	
China	Hungary	Mexico	Romania	Taiwan	

Hydra·Cell[®]

METERING SOLUTIONS™

Wanner Engineering, Inc.

World Headquarters & Manufacturing

Wanner Engineering, Inc.
1204 Chestnut Avenue,
Minneapolis, MN 55403 USA
Phone: 612-332-5681 • Fax: 612-332-6937
Toll-Free Fax (USA): 800-332-6812
Email: sales@wannereng.com
www.Hydra-Cell.com

Regional Office

207 US Highway 281
Wichita Falls, TX 76310 USA
Phone: 940-322-7111
Toll-Free: 800-234-1384
Email: sales@wannereng.com
www.Hydra-Cell.com

Latin American Office

Avenida Senador Vergueiro 608 – Centro
São Bernardo do Campo/São Paulo, Brazil
CEP 09750-000
Phone: +55 (11) 99582-1969
Email: mmagoni@wannereng.com
www.Hydra-Cell-Pumps.com.br

Wanner International Ltd.

Wanner International, Ltd.
Hampshire - United Kingdom
Phone: +44 (0) 1252 816847
Email: sales@wannerint.com
www.Hydra-Cell.co.uk

Wanner Pumps Ltd.

Wanner Pumps, Ltd.
Kowloon - Hong Kong
Phone: +852 3428 6534
Email: sales@wannerpumps.com
www.WannerPumps.com

Shanghai - China
Phone: +86-21-6876 3700
Email: sales@wannerpumps.com
www.WannerPumps.com